

1: GLAZING MATERIAL

- INNER OUTER
- ACRYLIC DOME
 - POLYCARBONATE DOME
 - TWIN WALL POLYCARBONATE 6MM
 - 8MM
 - 10MM
 - 16MM
 - TRIPLE WALL POLYCARBONATE

2: GLAZING COLOR

- CLEAR
 - BRONZE
 - WHITE
 - OTHER N/A
- TWIN WALL CLEAR
- OR BRONZE
- TRIPLE WALL WHITE

3: FRAME FINISH


- MILL
- BRONZE ANODIZED
- CLEAR ANODIZED
- CUSTOM COLOR

4: PYRAMID PITCH (OPTIONAL)

- 22 DEGREE (1/2 WIDTH X .414)
- 30 DEGREE (1/2 WIDTH X .577)
- 40 DEGREE (1/2 WIDTH X .839)

FOR SELF FLASHING SKYLIGHTS PROVIDE
ROUGH OPENING OR ID OF SKYLIGHT DIMENSION

- QTY: R.O. = X
- QTY: R.O. = X
- QTY: R.O. = X
- QTY: R.O. = X
- QTY: R.O. = X

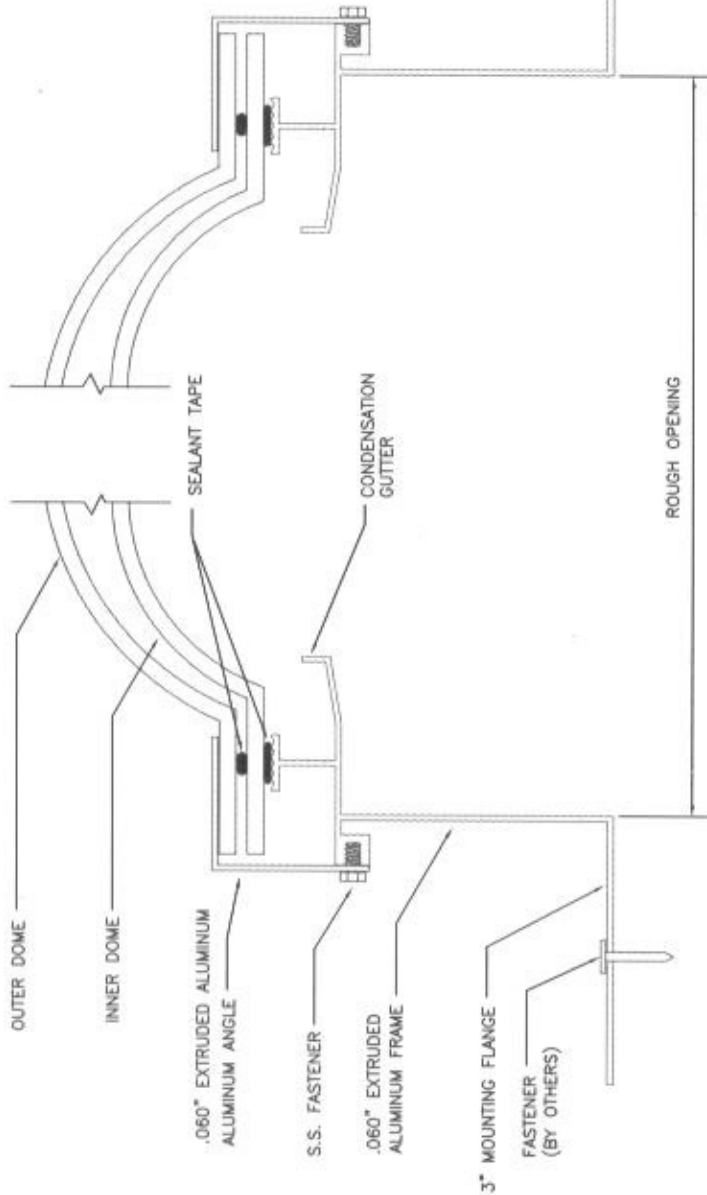

4" STANDARD SELF FLASHING

MINIMUM 3/12 PITCH REQUIRED



AMERICAN SKYLITES

525 113th STREET ARLINGTON, TEXAS 76011
Phone 800.772.7401 Fax 800.445.7282

SPECIFICATIONS	
TEST METHOD	TEST PRESSURE
AIR INFILTRATION ASTM E283	6.24 PSF (50 MPH)
WATER PENETRATION ASTM E547/E531	TEST PRESSURE 15.0 PSF
UNIFORM LOAD ASTM E330	POSITIVE 69.0 PSF NEGATIVE 75.0 PSF
	ALLOWED
	0.03 CFM/FT
	NO LEAKAGE
	60.0 PSF MIN
	40.0 PSF MIN