

1: GLAZING MATERIAL

- TEMPERED  INNER  OUTER
- LAMINATED
- TEMPERED & LAMINATED
- OVERALL GLASS THICKNESS  3/4"  1"
- OTHER \_\_\_\_\_

- TWIN WALL POLYCARBONATE  6MM   8MM   10MM   16MM
- TRIPLE WALL POLYCARBONATE

2: GLAZING COLOR

- CLEAR
- BRONZE  N/A
- WHITE
- OTHER \_\_\_\_\_


- TWIN WALL  CLEAR
- OR  BRONZE
- TRIPLE WALL  WHITE

3: FRAME FINISH

- MILL
- BRONZE ANODIZED
- CLEAR ANODIZED
- CUSTOM COLOR \_\_\_\_\_

FOR CURB MOUNT SKYLIGHTS PROVIDE  
OUTSIDE DIMENSION OF FINISHED CURB

- QTY: O.D. CURB= X
- QTY: O.D. CURB= X
- QTY: O.D. CURB= X
- QTY: O.D. CURB= X
- QTY: O.D. CURB= X

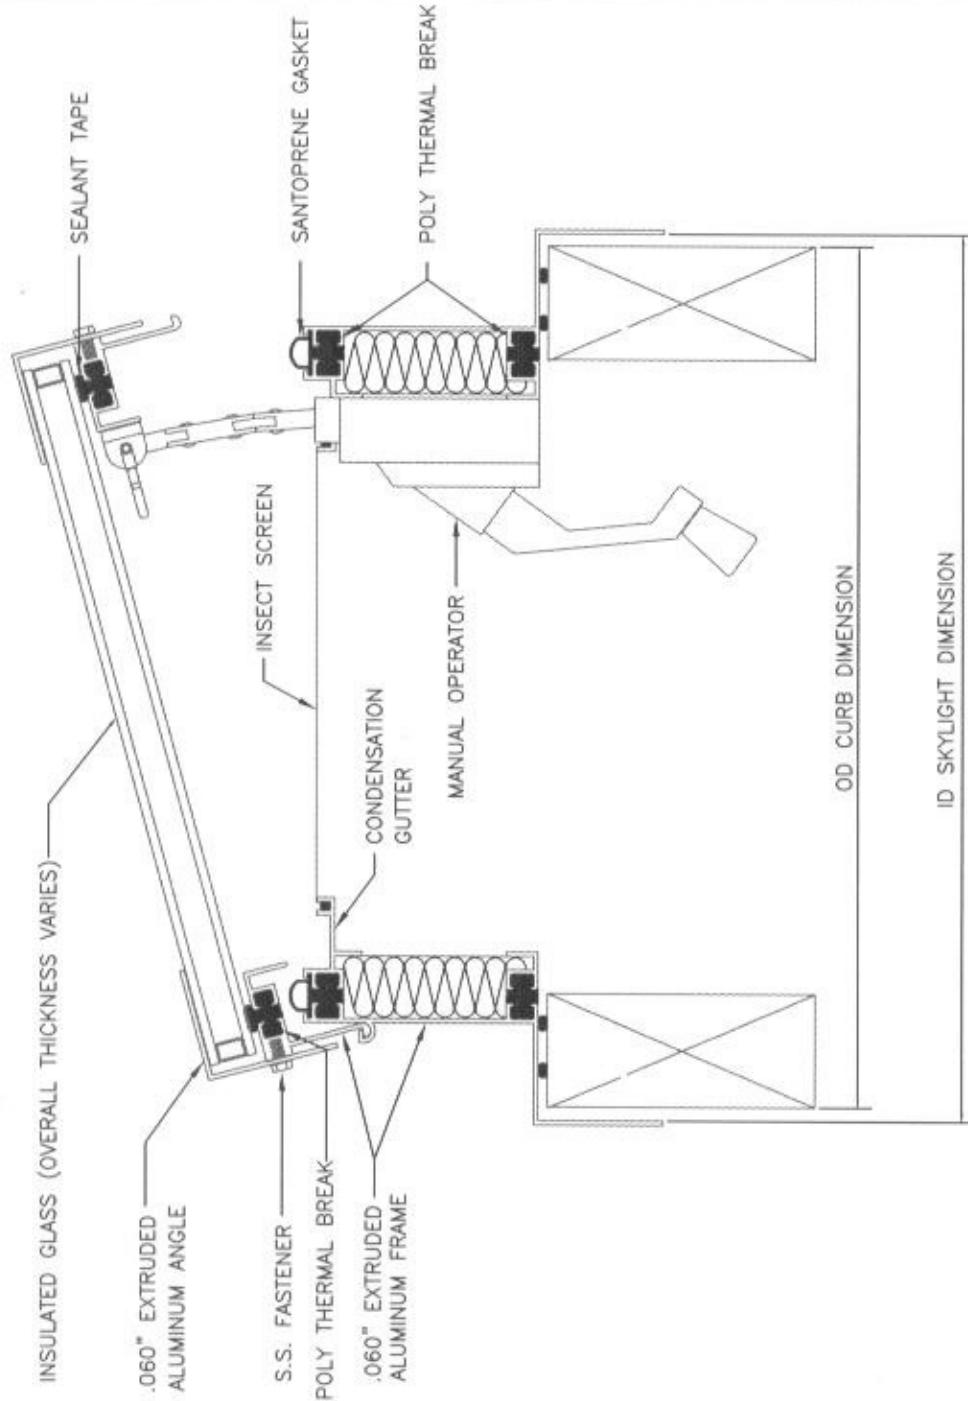

GLASS THERMALLY BROKEN & INSULATED VENTING CURB MOUNT

\*MINIMUM 3/12 PITCH REQUIRED\*



AMERICAN SKYLITES

525 113th STREET ARLINGTON, TEXAS 76011  
Phone 800.772.7401 Fax 800.445.7282

SPECIFICATIONS

TEST METHOD	TEST PRESSURE	ALLOWED
AIR INFILTRATION ASTM E283	6.24 PSF (50 MPH)	0.03 CFM/FT
WATER PENETRATION ASTM E547/E331	TEST PRESSURE 15.0 PSF	NO LEAKAGE
UNIFORM LOAD ASTM E330	POSITIVE 69.0 PSF NEGATIVE 75.0 PSF	60.0 PSF MIN 40.0 PSF MIN