

1: GLAZING MATERIAL

- ACRYLIC DOME INNER OUTER
- POLYCARBONATE DOME
- TWIN WALL POLYCARBONATE 6MM
- 8MM
- 10MM
- 16MM
- TRIPLE WALL POLYCARBONATE

2: GLAZING COLOR

- CLEAR
- BRONZE
- WHITE
- OTHER N/A
- TWIN WALL CLEAR
- OR BRONZE
- TRIPLE WALL WHITE

3: FRAME FINISH


- MILL
- BRONZE ANODIZED
- CLEAR ANODIZED
- CUSTOM COLOR

4: PYRAMID PITCH (OPTIONAL)

- 22 DEGREE (1/2 WIDTH X .414)
- 30 DEGREE (1/2 WIDTH X .577)
- 40 DEGREE (1/2 WIDTH X .839)

FOR SELF FLASHING SKYLIGHTS PROVIDE
ROUGH OPENING OR ID OF SKYLIGHT DIMENSION

QTY:	R.O.=	X
QTY:	R.O.=	X
QTY:	R.O.=	X
QTY:	R.O.=	X
QTY:	R.O.=	X

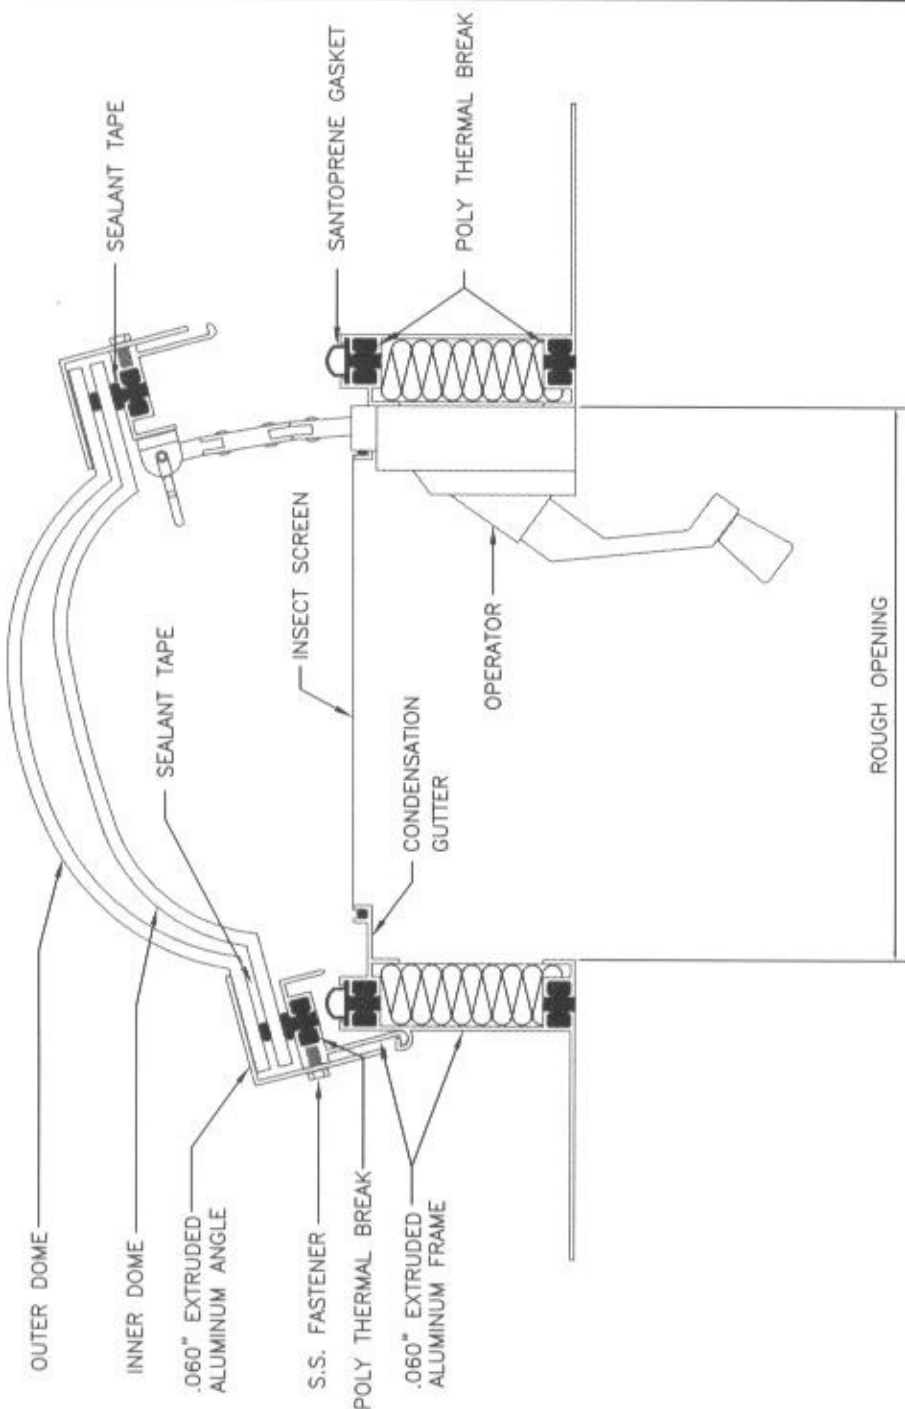

THERMALLY BROKEN & INSULATED VENTING SELF FLASHING

MINIMUM 3/12 PITCH REQUIRED



AMERICAN SKYLITES
525 113th STREET ARLINGTON, TEXAS 76011
Phone 800.772.7401 Fax 800.445.7282

SPECIFICATIONS		ALLOWED
TEST METHOD	TEST PRESSURE	
AIR INFILTRATION ASTM E283	6.24 PSF (50 MPH)	0.03 CFM/FT
WATER PENETRATION ASTM E547/E331	TEST PRESSURE 15.0 PSF	NO LEAKAGE
UNIFORM LOAD ASTM E330	POSITIVE 69.0 PSF NEGATIVE 75.0 PSF	60.0 PSF MIN 40.0 PSF MIN